

# Asiatic Elevator Technical Specification

Ideal for Low / Medium rise buildings, Private Villas & Properties, Limited Shaft requirements and Modernization Market.

Traction MR (Standard Pit Depth **1600 mm** & Overhead **4800 mm** required)


Traction MRL (Standard Pit Depth **1600 mm** & Overhead **4500 mm** required)

Traction MRL Home Lift (Min Pit Depth **300 mm** & Overhead **3000 mm** required)

## Features:

- ▶ Wide range of Loading Capacity **272 Kg ~ 3000 Kg.**
- ▶ High speed solutions up to **0.4 m/s ~3.0 m/s**
- ▶ Machine Room (M/R) or Machine Room Less solutions (MRL)
- ▶ New Motor Base with several adjustment positions
- ▶ New arrangement of diverting pulleys / less ropes' wear
- ▶ Rear counterweight / less No of supporting brackets.
- ▶ High strength of Car sling / Wide range of cabin finishes (Glass panoramic included)
- ▶ Conformity with **ISO-14665 & EN81-20/50, EN81-21**
- ▶ Low operational cost
- ▶ Easy installation & maintenance
- ▶ Automatic emergency operation in case of power failure as a standard

## Use:

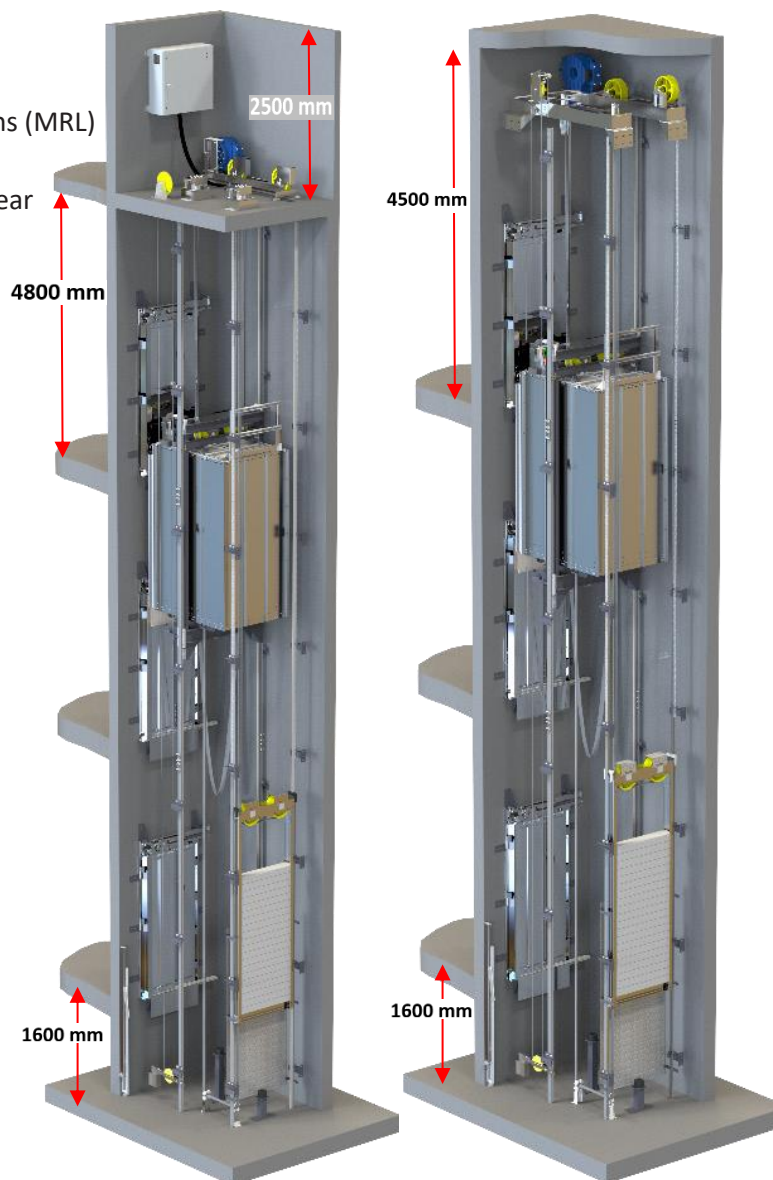

Machine Room shaft

MRL Shaft